




KTU5 Ultrasonic level transmitter

0125

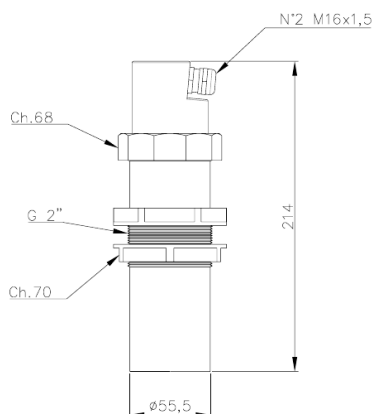

Servicies

After sale servicies

Ordinary and extraordinary maintenance, installation, staff training, spare parts, calibration and calibration for measuring instruments.



Product description

Compact ultrasonic instrument for general applications in liquids and bulk solids. Range from 0,25 to 5 m or 0,4 to 8 m. KTU5 has 3 modes of calibration:

by means of on-board buttons;

by means of VL620 module, "DISPLAY REMOTE";

by means of PC with s/w 010F105A MODBUS RTU.

This instrument is ideal for applications which require a compact transmitter without local display.

There is a wide choice of supply voltage, 24 Vdc, 24 Vac, 115 Vac or 230 Vac.

Two configurable relays allow alarm thresholds and pumps control.

A complete self-diagnosis makes it suitable for remote unattended measurements. Another important feature is the body, because it's full manufactured of PP that making it suitable for applications with a acids presence.



ComastriDistribution
Prodotti e soluzioni per l'industria S.r.l

28/03/2024

ComastriDistribution

Phone: +390513510702

Mail: info@comastridistribution.com



[Go to product](#)

General Features

Resolution	1mm	Range	max 0.25 ÷ 6m - max 0.40 ÷ 10m
Accuracy	± 0.5%	Temperature	-30 ÷ +70°C; + 80°C not continuously
Classificazione IP	IP67/IP68	Pressure	From 0,5 to 1,5 bar
Output	4 - 20mA, max 750ohm	Display	VL611 programming module (optional) with 4 buttons and matrix LCD
Display	VL611 programming module (optional) with 4 buttons and matrix LCD		

Models and prices

Model ref.	Model	Accessories	Power supply	Price VAT escl.
KTU51B4A	IP67, range 0.25 ÷ 6m, connection via 2 removable screw terminal blocks	None	24Vdc	477.74 €
KTU51B4D	IP67, range 0.25 ÷ 6m, connection via 2 removable screw terminal blocks	VL620 keyboard/display programming module with 1 m with USB cable	24Vdc	585.47 €
KTU52B2A	IP67, range 0,25÷6m, male connector IP67	None	24 Vdc - 230Vac 50÷60Hz	617.53 €
KTU52B2D	IP67, range 0,25÷6m, male connector IP67	VL620 keyboard/display programming module with 1 m with USB cable	24 Vdc - 230Vac 50÷60Hz	725.26 €
KTU54B2A	IP67, range 0,4÷10m, with male connector IP67	None	24 Vdc - 230Vac 50÷60Hz	667.55 €
KTU54B2D	IP67, range 0,4÷10m, with male connector IP67	VL620 keyboard/display programming module with 1 m with USB cable	24 Vdc - 230Vac 50÷60Hz	775.28 €
KTU51B1D	IP67, range 0.25 ÷ 6m, connection via 2 removable screw terminal blocks	VL620 keyboard/display programming module with 1 m with USB cable	115Vac	626.51 €

The prices could be not always up to date and they don't take into account any promotional sale on the e-commerce.